

Torrent GN D6 Series

BED WIDTH

82 in

BED LENGTH

12 ft – 14 ft – 16 ft

AXLES CONFIGURATION


2 x 7,000 lb – 2 x 8,000 lb – 2 x 10,000 lb – 3 x 7,000 lb – 3 x 8,000 lb

LOAD CAPACITY

10,650 lb – 17,000 lb

TORGND6-716G307-H

shown with front hydraulic jack (model upgrade)

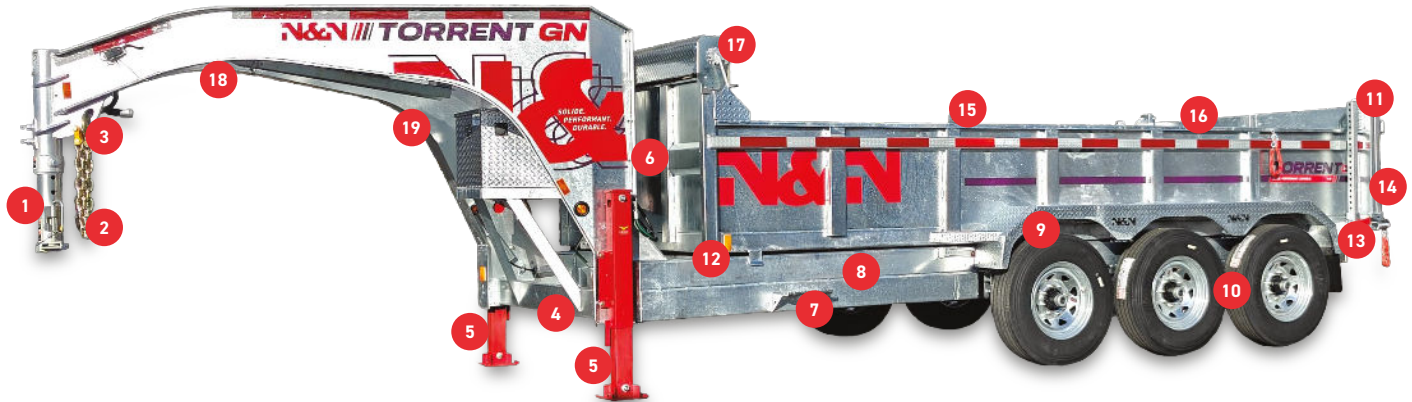

STANDARD FEATURES

- | | |
|--|--|
| <p>1 2 5/16 in adjustable gooseneck coupler Kingpin option available</p> <p>2 Quick connect for auxiliary 12 V supply (14 ft or 16 ft models)</p> <p>3 Flexible low-temperature connection wiring (Volflex - made in Canada)</p> <p>4 Aluminium toolbox N&N Smart Charger (15 A) 12 V deep cycle battery</p> <p>5 2 x 12,000 lb N&N drop leg jacks Zinc-plated Spring assist return</p> <p>6 Telescopic cylinder (3-stage) – 7 tons (12 ft model), 12 tons (14 ft and 16 ft models)</p> <p>7 Precision laser-cut footstep (driver's side)</p> <p>8 Frame tubing: 4 x 6 x 5/16 in Cross members at 16 in centers Fully welded frame</p> | <p>9 14 ga galvanized N&N checker plate fenders</p> <p>10 Galvanized axles with electric brakes Radial tires on galvanized rims Slipper spring suspension * 10,000 lb axles are not galvanized</p> <p>11 Galvanized 15 in x 72 in ramps 10,000 lb capacity Stores underneath</p> <p>12 All-round LED lighting</p> <p>13 36 in rear stabilizer legs</p> <p>14 Dual-action door (barn-door style & spreader)</p> <p>15 11 ga galvanized steel box 4 x 5/8 in D-rings welded to the box floor * 7 ga galvanized floor (10,000 lb axle model)</p> <p>16 Wood plank holder on each side</p> <p>17 Tarp and roller with aluminum checker plate cover</p> <p>18 Precision laser-cut gooseneck One-piece construction</p> <p>19 Integrated spare tire holder in gooseneck</p> |
|--|--|

MODEL UPGRADE (ADD OR COMBINE)



E-SERIES
Electro-hydraulic brake
(1,200 psi)



G-SERIES
Gas-Powered
Hydraulic Unit 13 HP



H-SERIES
Front hydraulic jack
12,000 lb capacity



L-SERIES (Landscape gate)
72 in model: 8,500 lb | 82 in model: 10,500 lb | Includes 4 in drop axle | * Only available on 7,000 lb axles



T-SERIES
7 ga galvanized floor | Cross members at 12 in centers

TORRENT GN D6 SERIES



OPTIONAL FEATURES (ADD-ON)



Wireless remote
for hydraulic unit



Aluminum
spring-assisted tarp



6 ft x 8 ft Deck on
gooseneck

DIMENSIONS

MODEL	7 ft x 12 ft	7 ft x 14 ft	7 ft x 16 ft
Overall width	102 in / 259 cm	102 in / 259 cm	102 in / 259 cm
Overall length	255 in / 648 cm	278 in / 706 cm	302 in / 767 cm
Usable width	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm
Usable length	145 in / 368 cm	168 in / 427 cm	192 in / 488 cm
Bed height (landscape series)	30 in / 76 cm	30 in / 76 cm	30 in / 76 cm
Box thickness	11 ga / 3.13 mm	11 ga / 3.13 mm	11 ga / 3.13 mm
Box thickness (10,000 lb model)		7 ga / 4.65 mm	7 ga / 4.65 mm
Box height (front & rear)	32 in / 81 cm	32 in / 81 cm	32 in / 81 cm
Box height (sides)	23 in / 58 cm	23 in / 58 cm	23 in / 58 cm

AXLES CONFIGURATION

2 x 7,000 lb (3,175 kg) AXLES	TORGND6-712G207	TORGND6-714G207	TORGND6-716G207
Trailer weight	5,540 lb / 2,513 kg	5,845 lb / 2,651 kg	6,150 lb / 2,790 kg
Load capacity	11,260 lb / 5,107 kg	10,955 lb / 4,969 kg	10,650 lb / 4,831 kg
Tire size	235/80R16 14 ply	235/80R16 14 ply	235/80R16 14 ply
Gross Vehicle Weight Rating (GVWR)	16,800 lb / 7,620 kg	16,800 lb / 7,620 kg	16,800 lb / 7,620 kg

2 x 8,000 lb (3,629 kg) AXLES	TORGND6-714G208	TORGND6-716G208
Trailer weight	5,995 lb / 2,719 kg	6,300 lb / 2,858 kg
Load capacity	13,205 lb / 5,990 kg	12,900 lb / 5,851 kg
Tire size	215/75R17.5 16 ply	215/75R17.5 16 ply
Gross Vehicle Weight Rating (GVWR)	19,200 lb / 8,709 kg	19,200 lb / 8,709 kg

3 x 7,000 lb (3,175 kg) AXLES	TORGND6-716G307
Trailer weight	6,500 lb / 2,948 kg
Load capacity	15,500 lb / 7,031 kg
Tire size	235/80R16 14 ply
Gross Vehicle Weight Rating (GVWR)	22,000 lb / 9,979 kg

3 x 8,000 lb (3,629 kg) AXLES	TORGND6-716G308
Trailer weight	7,000 lb / 3,175 kg
Load capacity	17,000 lb / 7,711 kg
Tire size	215/75R17.5 16 ply
Gross Vehicle Weight Rating (GVWR)	24,000 lb / 10,886 kg

2 x 10,000 lb (4,536 kg) AXLES	TORGND6-714G210	TORGND6-716G210
Trailer weight	6,195 lb / 2,810 kg	6,500 lb / 2,948 kg
Load capacity	15,805 lb / 7,169 kg	15,500 lb / 7,031 kg
Tire size	235/75R17.5 18 ply	235/75R17.5 18 ply
Gross Vehicle Weight Rating (GVWR)	22,000 lb / 9,979 kg	22,000 lb / 9,979 kg