


Iron C5 Series

DECK WIDTH	DECK LENGTH	AXLES CONFIGURATION	LOAD CAPACITY
82 in	16 ft – 18 ft – 20 ft – 22 ft – 24 ft	2 x 3,500 lb – 2 x 5,200 lb	4,600 lb – 7,820 lb

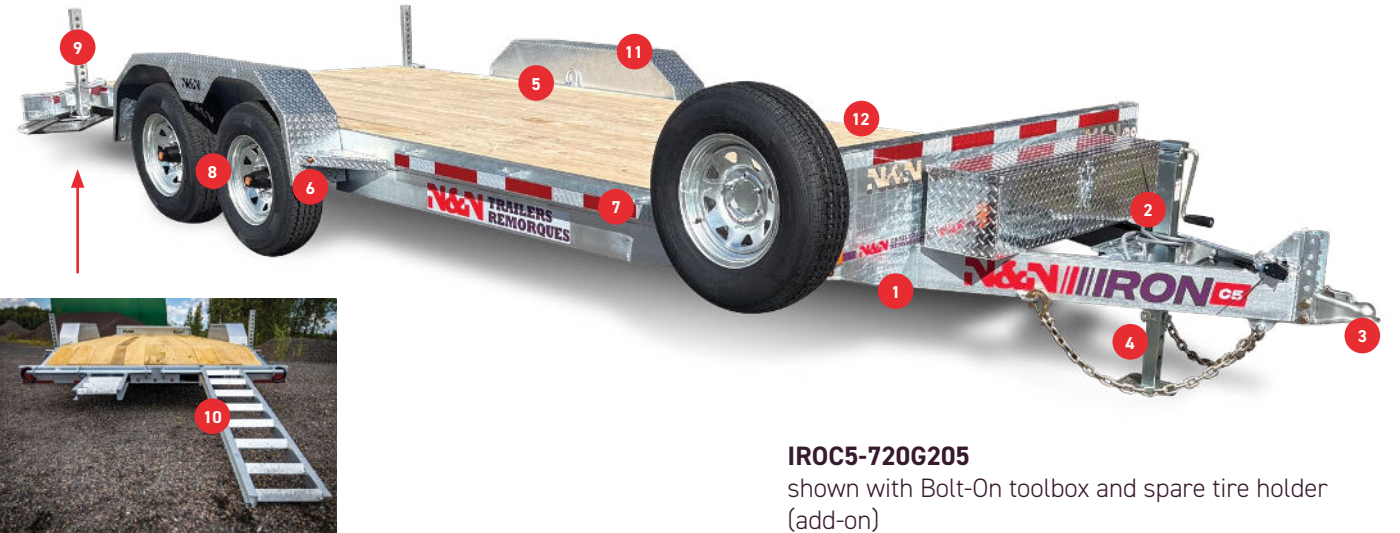

IROC5-720G205
shown with Bolt-On toolbox and spare tire holder (add-on)

STANDARD FEATURES

1	Frame: 5 in C-channel Cross members at 16 in centers Fully welded frame	7	Stake pocket with rub rail
2	Low-temperature flexible wiring (Voltflex - made in Canada)	8	Galvanized axles with electric brakes Radial tires on galvanized rims Slipper spring suspension
3	2 5/16 in adjustable coupler (5 positions)	9	24 in rear stabilizer legs
4	7,000 lb N&N drop-leg jack Zinc-plated	10	Galvanized 14 in x 60 in ramps 10,000 lb capacity Stores underneath
5	6 x 5/8 in D-ring welded	11	14 ga galvanized N&N checker plate fenders
6	All-round LED lighting	12	2 x 8 in hemlock floor 2 ft checker Plate Beavertail with welded traction bars

MODEL UPGRADE (ADD OR COMBINE)



E-SERIES
Electro-hydraulic brake (1,200 psi)



H-SERIES
Front hydraulic jack



S-SERIES
Straight deck




W-SERIES
Winch plate

IRON C5 SERIES



OPTIONAL FEATURES (ADD-ON)

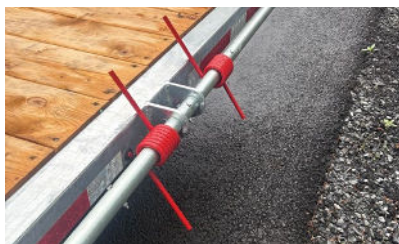

Spring for stand-up ramps



Split gate ramps with springs
(8,500 lb capacity)



Stand-up ramps 18 in x 60 in
(10,000 lb capacity)



Spare tire holder (bolt-on)



Bolt-on toolbox | 11 in x 11 in x 46 in

DIMENSIONS

MODEL	7 ft x 16 ft	7 ft x 18 ft	7 ft x 20 ft	7 ft x 22 ft	7 ft x 24 ft
Overall width	102 in / 259 cm	102 in / 259 cm	102 in / 259 cm	102 in / 259 cm	102 in / 259 cm
Overall length	244 in / 620 cm	268 in / 681 cm	292 in / 742 cm	316 in / 803 cm	340 in / 864 cm
Usable width	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm
Usable length	192 in / 488 cm	216 in / 549 cm	240 in / 610 cm	264 in / 671 cm	288 in / 732 cm

AXLES CONFIGURATION

2 x 3,500 lb (1,588 kg) AXLES	IROC5-716G235	IROC5-718G235	IROC5-720G235	
Gross Vehicle Weight Rating (GVWR)	7,000 lb / 3,175 kg	7,000 lb / 3,175 kg	7,000 lb / 3,175 kg	
Trailer Weight	2,000 lb / 907 kg	2,225 lb / 1,009 kg	2,400 lb / 1,089 kg	
Load capacity	5,000 lb / 2,268 kg	4,775 lb / 2,166 kg	4,600 lb / 2,087 kg	
Tire Size	205/75R14 6 ply	205/75R14 6 ply	205/75R14 6 ply	
Deck height	23 in / 58 cm	23 in / 58 cm	23 in / 58 cm	

2 x 5,200 lb (2,358 kg) AXLES	IROC5-716G205	IROC5-718G205	IROC5-720G205	IROC5-722G205	IROC5-724G205
Gross Vehicle Weight Rating (GVWR)	9,820 lb / 4,454 kg	9,820 lb / 4,454 kg	9,820 lb / 4,454 kg	9,820 lb / 4,454 kg	9,820 lb / 4,454 kg
Trailer Weight	2,000 lb / 907 kg	2,225 lb / 1,009 kg	2,400 lb / 1,089 kg	2,600 lb / 1,179 kg	2,800 lb / 1,270 kg
Load capacity	7,820 lb / 3,547 kg	7,595 lb / 3,445 kg	7,420 lb / 3,366 kg	7,220 lb / 3,275 kg	7,020 lb / 3,184 kg
Tire Size	225/75R15 8 ply	225/75R15 8 ply	225/75R15 8 ply	225/75R15 8 ply	225/75R15 8 ply
Deck height	24 in / 61 cm	24 in / 61 cm	24 in / 61 cm	24 in / 61 cm	24 in / 61 cm