


Iron C6 Series

DECK WIDTH	DECK LENGTH	AXLES CONFIGURATION	LOAD CAPACITY
82 in	16 ft – 18 ft – 20 ft – 22 ft – 24 ft	2 x 7,000 lb	11,600 lb - 12,400 lb

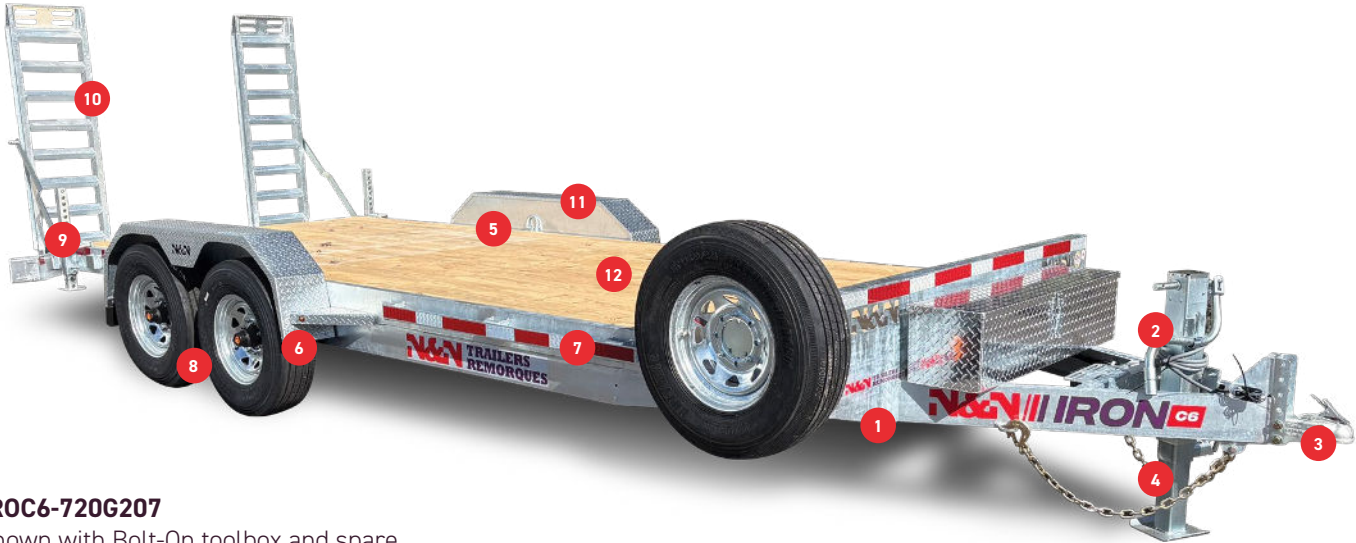

IROC6-720G207
shown with Bolt-On toolbox and spare
tire holder (Add-on)

STANDARD FEATURES

1	Frame: 6 in C-channel Cross members at 16 in centers Fully welded frame	7	Stake pocket with rub rail
2	Low-temperature flexible wiring (Vultflex - made in Canada)	8	Galvanized axles with electric brakes Radial tires on galvanized rims Slipper spring suspension
3	2 5/16 in adjustable coupler (5 positions)	9	24 in rear stabilizer legs
4	12,000 lb N&N drop-leg jacks Zinc-plated Spring-assist return	10	Galvanized 18 in x 60 in ramps 10,000 lb capacity Stand-up
5	6 x 5/8 in D-ring welded	11	14 ga galvanized N&N checker plate fenders
6	All-round LED lighting	12	2 x 8 in hemlock floor 2 ft checker Plate Beavertail with welded traction bars

MODEL UPGRADE (ADD OR COMBINE)



E-SERIES
Electro-hydraulic brake (1,200 psi)



H-SERIES
Front hydraulic jack



S-SERIES
Straight deck




W-SERIES
Winch plate

IRON C6 SERIES



OPTIONAL FEATURES (ADD-ON)

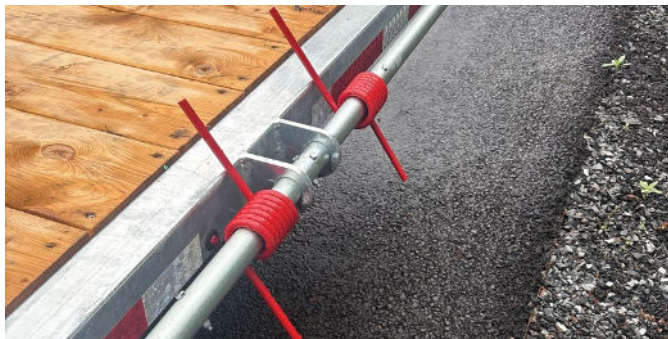

Spring for stand-up ramps



Spare tire holder (bolt-on)



Split gate ramps with springs (8,500 lb capacity)



Bolt-on toolbox | 11 in x 11 in x 46 in

DIMENSIONS

MODEL	7 ft x 16 ft	7 ft x 18 ft	7 ft x 20 ft	7 ft x 22 ft	7 ft x 24 ft
Overall width	102 in / 259 cm	102 in / 259 cm	102 in / 259 cm	102 in / 259 cm	102 in / 259 cm
Overall length	244 in / 620 cm	268 in / 681 cm	292 in / 742 cm	316 in / 803 cm	340 in / 864 cm
Usable width	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm
Usable length	192 in / 488 cm	216 in / 549 cm	240 in / 610 cm	264 in / 671 cm	288 in / 732 cm

AXLES CONFIGURATION

2 x 7,000 lb (3,175 kg) AXLES	IROC6-716G207	IROC6-718G207	IROC6-720G207	IROC6-722G207	IROC6-724G207
Gross Vehicle Weight Rating (GVWR)	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg
Trailer Weight	2,600 lb / 1,179 kg	2,800 lb / 1,270 kg	3,000 lb / 1,361 kg	3,200 lb / 1,451 kg	3,400 lb / 1,542 kg
Load capacity	12,400 lb / 5,625 kg	12,200 lb / 5,534 kg	12,000 lb / 5,443 kg	11,800 lb / 5,443 kg	11,600 lb / 5,262 kg
Tire Size	235/80R16 14 ply	235/80R16 14 ply	235/80R16 14 ply	235/80R16 14 ply	235/80R16 14 ply
Deck height	25 in / 63.5 cm	25 in / 63.5 cm	25 in / 63.5 cm	25 in / 63.5 cm	25 in / 63.5 cm