


Sequoia C5 Series

DECK WIDTH	DECK LENGTH	AXLES CONFIGURATION	LOAD CAPACITY
82 in	12 ft – 14 ft – 16 ft – 18 ft – 20 ft – 22 ft – 24 ft	2 X 5,200 lb - 2 x 7,000 lb	7,520 lb - 12,800 lb

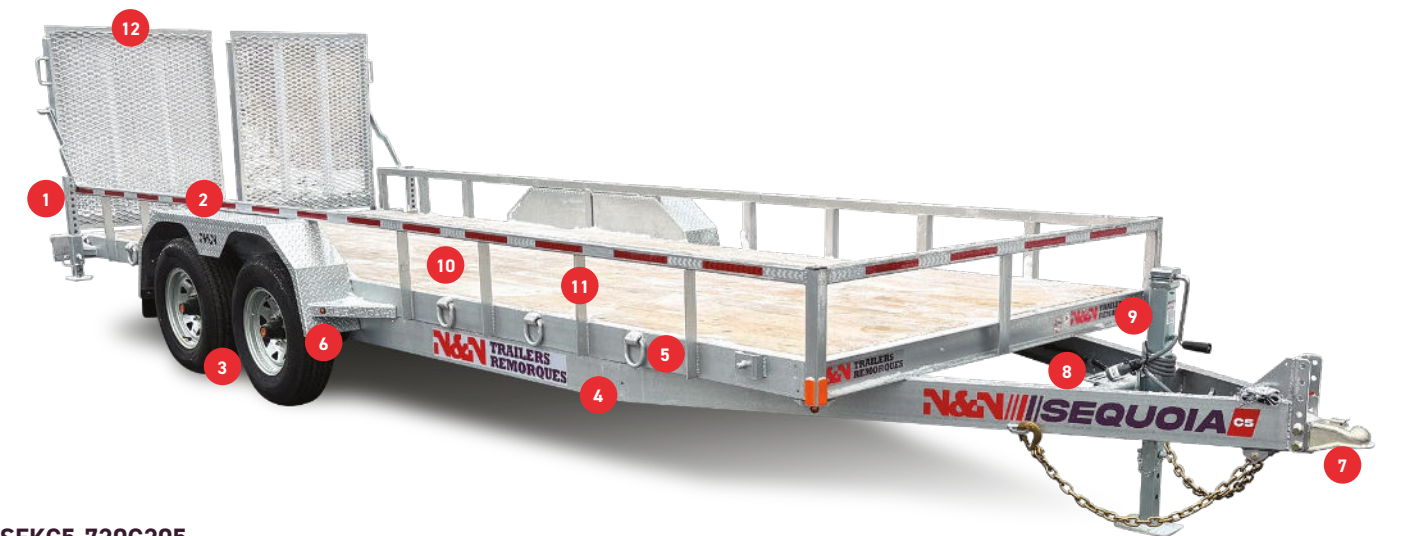

SEKC5-720G205

STANDARD FEATURES

1	24 in rear stabilizer legs	7	2 5/16 in adjustable coupler (5 positions)
2	14 ga galvanized N&N checker plate fenders	8	Low-temperature flexible wiring (Vultflex - made in Canada)
3	Galvanized axles with electric brakes Radial tires on galvanized rims Slipper spring suspension	9	7,000 lb N&N drop-leg jack Zinc-plated
4	Frame: 4 in C-channel (3,500 lb models) 5 in C-channel (5,200 lb models) Cross members at 16 in centers Fully welded frame	10	2 x 8 in hemlock floor
5	6 x 5/8 in D-ring welded on side	11	12 in high open side
6	All-round LED lighting	12	48 in split gate ramps with springs (8,500 lb capacity)


MODEL UPGRADE
(ADD OR COMBINE)



E-SERIES
Electro-hydraulic brake (1,200 psi)



H-SERIES
Front hydraulic jack

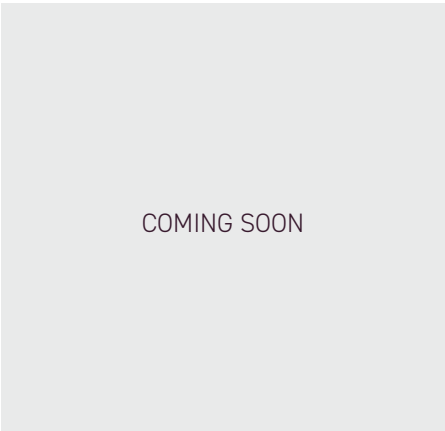

V-SERIES
48 in removable passenger side

SEQUOIA C5 SERIES



OPTIONAL FEATURES (ADD-ON)



Spare tire holder (bolt-on)



Bolt-On toolbox | 11 in x 11 in x 46 in

DIMENSIONS

MODEL	7 ft x 12 ft	7 ft x 14 ft	7 ft x 16 ft	7 ft x 18 ft	7 ft x 20 ft	7 ft x 22 ft	7 ft x 24 ft
Overall width	100 in / 254 cm	100 in / 254 cm	100 in / 254 cm	100 in / 254 cm	100 in / 254 cm	100 in / 254 cm	100 in / 254 cm
Overall length	202 in / 513 cm	226 in / 574 cm	250 in / 635 cm	274 in / 696 cm	298 in / 757 cm	298 in / 757 cm	322 in / 818 cm
Usable width	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm
Usable length	144 in / 366 cm	168 in / 427 cm	192 in / 488 cm	216 in / 549 cm	240 in / 610 cm	264 in / 671 cm	288 in / 732 cm

AXLES CONFIGURATION

2 x 5,200 lb (2,359 kg) AXLES	SEKC5-712G205	SEKC5-714G205	SEKC5-716G205	SEKC5-718G205	SEKC5-720G205	
Gross Vehicle Weight Rating (GVWR)	9,820 lb / 4,454 kg	9,820 lb / 4,454 kg	9,820 lb / 4,454 kg	9,820 lb / 4,454 kg	9,820 lb / 4,454 kg	
Trailer weight	1,500 lb / 680 kg	1,700 lb / 771 kg	1,900 lb / 862 kg	2,100 lb / 953 kg	2,300 lb / 1,043 kg	
Load capacity	8,320 lb / 3,774 kg	8,120 lb / 3,683 kg	7,920 lb / 3,592 kg	7,720 lb / 3,502 kg	7,520 lb / 3,411 kg	
Tire size	225/75R15 8 ply	225/75R15 8 ply	225/75R15 8 ply	225/75R15 8 ply	225/75R15 8 ply	
Deck height	23 in / 58 cm	23 in / 58 cm	23 in / 58 cm	23 in / 58 cm	23 in / 58 cm	

2 x 7,000 lb (3,175 kg) AXLES	SEKC5-716G207	SEKC5-718G207	SEKC5-720G207	SEKC5-722G207	SEKC5-724G207
Gross Vehicle Weight Rating (GVWR)	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg
Trailer weight	2,200 lb / 998 kg	2,400 lb / 1,089 kg	2,600 lb / 1,179 kg	2,800 lb / 1,270 kg	3,000 lb / 1,361 kg
Load capacity	12,800 lb / 5,806 kg	12,600 lb / 5,715 kg	12,400 lb / 5,624 kg	12,200 lb / 5,534 kg	12,000 lb / 5,443 kg
Tire size	235/80R16 14 ply	235/80R16 14 ply	235/80R16 14 ply	235/80R16 14 ply	235/80R16 14 ply
Deck height	24 in / 61 cm	24 in / 61 cm	24 in / 61 cm	24 in / 61 cm	24 in / 61 cm