



SOLID. POWERFUL. DURABLE.

DECKOVER TRAILERS

RHINOS **H8** **JUNIOR**



RHJH8-825G210-F
Under-mount toolbox (additional option)


TECHNICAL SPECIFICATIONS

Important note: In the interest of continuous improvement, the dimensions, weights, and specifications presented in this document are subject to change without notice. Please validate the specific dimensions required for your needs with your representative at the time of order.

Rhinos H8 Junior Series

4 ft beavertail / Stand-up ramps

WIDTH	LENGTH	AXLE CONFIGURATION	PAYLOAD CAPACITY
102 in 259 cm	22 ft - 24 ft - 26 ft 671 cm - 732 cm - 792 cm	2 x 7,000 lb - 2 x 8,000 lb - 2 x 10,000 lb - 3 x 7,000 lb - 3 x 8,000 lb 2 x 3,175 kg - 2 x 3,628 kg - 2 x 4,536 kg - 3 x 3,175 kg - 3 x 3,628 kg	10,200 lb - 19,300 lb 4,626 kg - 8,754 kg

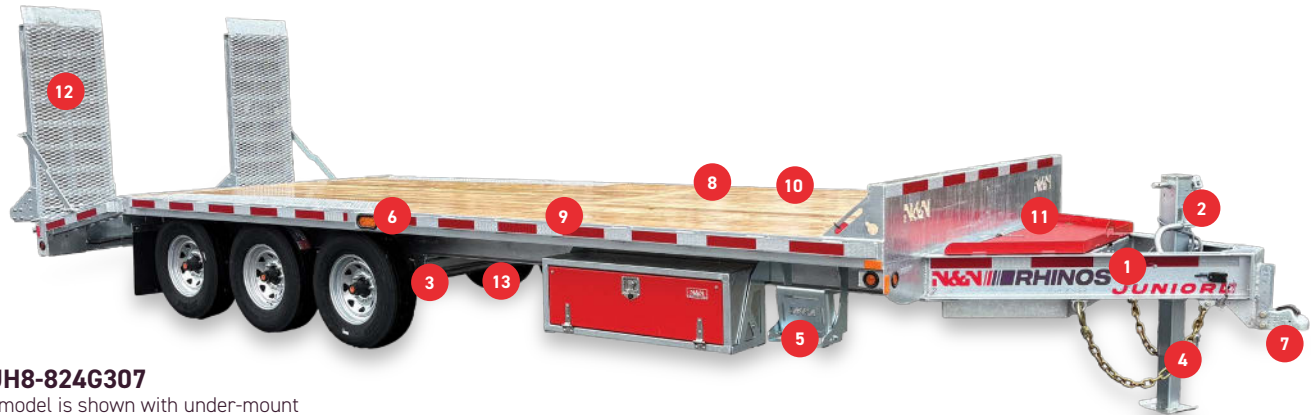

RHJH8-824G307

This model is shown with under-mount toolbox (additional option).

STANDARD FEATURES

1	Fully welded frame 8 in H-beams	8	2 in x 8 in hemlock decking Floor crossmembers on 16 in centers
2	Cold-weather flexible wiring (Voltflex - made in Canada)	9	Stake pockets with rub rail
3	Galvanized axles with electric brakes Radial tires on galvanized rims Slipper spring suspension	10	Sliding winch track (driver's side)
4	N&N 12,000 lb drop-leg jack with spring-loaded return Zinc coating	11	N&N A-frame toolbox
5	Folding steps on each side	12	24 in x 60 in stand-up ramps 16,000 lb capacity Spring-assisted Adjustable support legs on ramps
6	All-around LED lighting	13	Spare tire mount between H-beams
7	Adjustable 2 5/16 in coupler (5 positions)		

MANUFACTURING OPTIONS

E Electric-hydraulic brakes



H 12,000 lb hydraulic jack with pump, battery and charger in A-frame toolbox



P Winch plate welded on deck, 12 in x 14 in



Combinable options • To be selected at time of order • Factory installation only

RHINOS H8 JUNIOR SERIES

OPTIONAL ACCESSORIES

Straps and galvanized binder

3 in x 30 ft (5,400 lb)




N&N under-mount toolbox

13 in x 16 in x 48 in



Removable 5/8 in D-ring

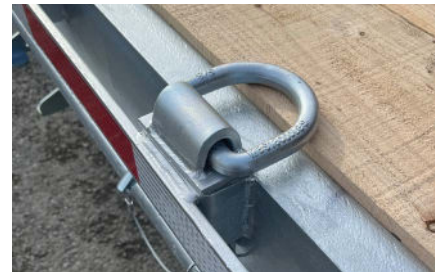

Optional accessories, can be added at any time.

DIMENSIONS

MODEL	8.5 ft x 22 ft	8.5 ft x 24 ft	8.5 ft x 26 ft
Overall width	102 in / 259 cm	102 in / 259 cm	102 in / 259 cm
Overall length	338 in / 859 cm	362 in / 919 cm	386 in / 980 cm
Usable width	97 1/2 in / 248 cm	97 1/2 in / 248 cm	97 1/2 in / 248 cm
Usable length	216 in / 549 cm Deck 48 in / 122 cm Beavertail	240 in / 610 cm Deck 48 in / 122 cm Beavertail	264 in / 671 cm Deck 48 in / 122 cm Beavertail
Deck height	35 in / 89 cm	35 in / 89 cm	35 in / 89 cm

AXLE CONFIGURATIONS

2 x 7,000 lb AXLES (3,175 kg)	RHJH8-822G207	RHJH8-824G207	RHJH8-826G207
Trailer weight	4,200 lb / 1,905 kg	4,500 lb / 2,041 kg	4,800 lb / 2,177 kg
Payload capacity	10,800 lb / 4,899 kg	10,500 lb / 4,763 kg	10,200 lb / 4,626 kg
Tire size	235/80R16 14-ply	235/80R16 14-ply	235/80R16 14-ply
Gross Vehicle Weight Rating (GVWR)	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg

2 x 8,000 lb AXLES (3,628 kg)	RHJH8-822G208	RHJH8-824G208	RHJH8-826G208
Trailer weight	4,200 lb / 1,905 kg	4,500 lb / 2,041 kg	4,800 lb / 2,177 kg
Payload capacity	13,400 lb / 6,078 kg	13,100 lb / 5,942 kg	12,800 lb / 5,805 kg
Tire size	215/75R17.5 16-ply	215/75R17.5 16-ply	215/75R17.5 16-ply
Gross Vehicle Weight Rating (GVWR)	17,600 lb / 7,983 kg	17,600 lb / 7,983 kg	17,600 lb / 7,983 kg

2 x 10,000 lb AXLES (4,536 kg)	RHJH8-824G210	RHJH8-826G210
Trailer weight	4,700 lb / 2,132 kg	5,000 lb / 2,268 kg
Payload capacity	16,300 lb / 7,393 kg	16,000 lb / 7,257 kg
Tire size	235/75R17.5 18-ply	235/75R17.5 18-ply
Gross Vehicle Weight Rating (GVWR)	21,000 lb / 9,525 kg	21,000 lb / 9,525 kg

3 x 7,000 lb AXLES (3,175 kg)	RHJH8-824G307	RHJH8-826G307
Trailer weight	4,700 lb / 2,132 kg	5,000 lb / 2,268 kg
Payload capacity	19,300 lb / 8,754 kg	19,000 lb / 8,618 kg
Tire size	235/80R16 14-ply	235/80R16 14-ply
Gross Vehicle Weight Rating (GVWR)	21,000 lb / 9,525 kg	21,000 lb / 9,525 kg


3 x 8,000 lb AXLES (3,628 kg)	RHJH8-824G308	RHJH8-826G308
Trailer weight	4,700 lb / 2,132 kg	5,000 lb / 2,268 kg
Payload capacity	19,300 lb / 8,754 kg	19,300 lb / 8,754 kg
Tire size	215/75R17.5 16-ply	215/75R17.5 16-ply
Gross Vehicle Weight Rating (GVWR)	24,000 lb / 10,886 kg*	24,000 lb / 10,886 kg*

* 3 in pintle ring or 2 5/16 in coupler available for a 24,000 lb / 10,886 kg GVWR.

Rhinos H8 Junior Series - F

5 ft beavertail / Flip-over ramps

WIDTH	LENGTH	AXLE CONFIGURATIONS	PAYLOAD CAPACITY
102 in 259 cm	25 ft - 27 ft 762 cm - 823 cm	2 x 7,000 lb - 2 x 8,000 lb - 2 x 10,000 lb - 3 x 7,000 lb - 3 x 8,000 lb 2 x 3,175 kg - 2 x 3,628 kg - 2 x 4,536 kg - 3 x 3,175 kg - 3 x 3,628 kg	8,950 lb - 18,050 lb 4,059 kg - 8,187 kg

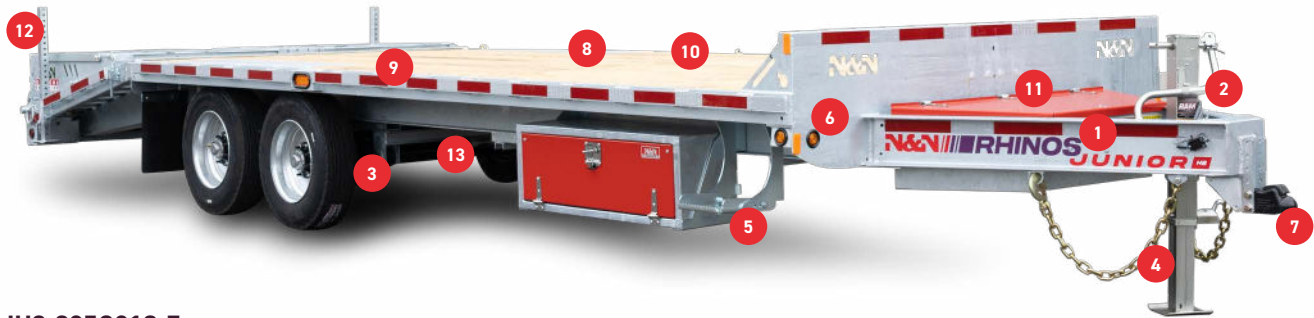

RHJH8-825G210-F

This model is shown with under-mount toolbox (additional option).

STANDARD FEATURES

1	Fully welded frame 8 in H-beams	7	Adjustable 2 5/16 in coupler (5 positions)
2	Cold-weather flexible wiring (Voltflex - made in Canada)	8	2 in x 8 in hemlock decking Floor crossmembers on 16 in centers
3	Galvanized axles with electric brakes Radial tires on galvanized rims Slipper spring suspension	9	Stake pockets with rub rail
4	N&N 12,000 lb drop-leg jack with spring-loaded return Zinc coating	10	Sliding winch track (driver's side)
5	Folding steps on each side	11	N&N A-frame toolbox
6	All-around LED lighting	12	36 in rear stabilizer legs
		13	Spare tire mount between H-beams

MANUFACTURING OPTIONS

E

Electric-hydraulic brakes



H

12,000 lb hydraulic jack

with pump, battery and charger in A-frame toolbox



P

Winch plate

welded on deck, 12 in x 14 in



R

Flip-over ramps

hydraulically operated



Combinable options • To be selected at time of order • Factory installation only

RHINOS H8 JUNIOR SERIES - F



OPTIONAL ACCESSORIES

Straps and galvanized binder

3 in x 30 ft (5,400 lb)



N&N under-mount toolbox

13 in x 16 in x 48 in



Removable 5/8 in D-ring



Optional accessories, can be added at any time.

DIMENSIONS

MODEL	8.5 ft x 25 ft	8.5 ft x 27 ft
Overall width	102 in / 259 cm	102 in / 259 cm
Overall length	365 in / 927 cm	388 in / 986 cm
Usable width	97 1/2 in / 248 cm	97 1/2 in / 248 cm
Usable length	240 in / 610 cm Deck 60 in / 152 cm Beavertail	264 in / 671 cm Deck 60 in / 152 cm Beavertail
Deck height	35 in / 89 cm	35 in / 89 cm

AXLE CONFIGURATIONS

2 x 7,000 lb AXLES (3,175 kg)	RHJH8-825G207-F	RHJH8-827G207-F
Trailer weight	5,750 lb / 2,608 kg	6,050 lb / 2,744 kg
Payload capacity	9,250 lb / 4,195 kg	8,950 lb / 4,059 kg
Tire size	235/80R16 14-ply	235/80R16 14-ply
Gross Vehicle Weight Rating (GVWR)	15,000 lb / 6,804 kg	15,000 lb / 6,804 kg

2 x 8,000 lb AXLES (3,628 kg)	RHJH8-825G208-F	RHJH8-827G208-F
Trailer weight	5,750 lb / 2,608 kg	6,050 lb / 2,744 kg
Payload capacity	11,850 lb / 5,375 kg	11,550 lb / 5,238 kg
Tire size	215/75R17.5 16-ply	215/75R17.5 16-ply
Gross Vehicle Weight Rating (GVWR)	17,600 lb / 7,983 kg	17,600 lb / 7,983 kg

2 x 10,000 lb AXLES (4,536 kg)	RHJH8-825G210-F	RHJH8-827G210-F
Trailer weight	5,950 lb / 2,698 kg	6,250 lb / 2,834 kg
Payload capacity	15,050 lb / 6,826 kg	14,750 lb / 6,690 kg
Tire size	235/75R17.5 18-ply	235/75R17.5 18-ply
Gross Vehicle Weight Rating (GVWR)	21,000 lb / 9,525 kg	21,000 lb / 9,525 kg

3 x 7,000 lb AXLES (3,175 kg)	RHJH8-825G307-F	RHJH8-827G307-F
Trailer weight	5,950 lb / 2,698 kg	6,250 lb / 2,834 kg
Payload capacity	15,050 lb / 6,826 kg	14,750 lb / 6,690 kg
Tire size	235/80R16 14-ply	235/80R16 14-ply
Gross Vehicle Weight Rating (GVWR)	21,000 lb / 9,525 kg	21,000 lb / 9,525 kg

3 x 8,000 lb AXLES (3,628 kg)	RHJH8-825G308-F	RHJH8-827G308-F
Trailer weight	5,950 lb / 2,698 kg	6,250 lb / 2,834 kg
Payload capacity	18,050 lb / 8,187 kg	17,750 lb / 8,051 kg
Tire size	215/75R17.5 16-ply	215/75R17.5 16-ply
Gross Vehicle Weight Rating (GVWR)	24,000 lb / 10,886 kg*	24,000 lb / 10,886 kg*

* 3 in pintle ring or 2 5/16 in coupler available for a 24,000 lb / 10,886 kg GVWR.



SOLID.
POWERFUL.
DURABLE.