

Sequoia C4 Series

DECK WIDTH	DECK LENGTH	AXLES CONFIGURATION	LOAD CAPACITY
82 in	12 ft – 14 ft – 16ft – 18 ft	2 x 3,500 lb	4,900 lb – 5,500 lb

SEKC4-718G235
COMING SOON

STANDARD FEATURES

1	24 in rear stabilizer legs	7	2 5/16 in adjustable coupler (5 positions)
2	14 ga galvanized N&N checker plate fenders	8	Low-temperature flexible wiring (Volflex - made in Canada)
3	Galvanized axles with electric brakes Radial tires on galvanized rims Slipper spring suspension	9	7,000 lb N&N drop-leg jack Zinc-plated
4	Frame: 4 in C-channel (3,500 lb models) 5 in C-channel (5,200 lb models) Cross members at 16 in centers Fully welded frame	10	2 x 8 in hemlock floor
5	6 x 5/8 in D-ring welded on side	11	12 in high open side
6	All-round LED lighting	12	48 in split gate ramps with springs (8,500 lb capacity)


MODEL UPGRADE
(ADD OR COMBINE)



E-SERIES
Electro-hydraulic brake (1,200 psi)



H-SERIES
Front hydraulic jack

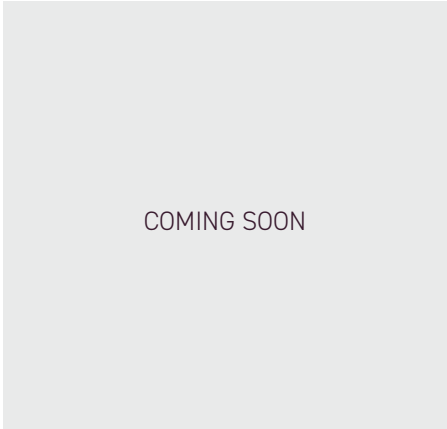

V-SERIES
48 in removable passenger side

SEQUOIA C4 SERIES



OPTIONAL FEATURES (ADD-ON)



Spare tire holder (bolt-on)



Bolt-On toolbox | 11 in x 11 in x 46 in

DIMENSIONS

MODEL	7 ft x 12 ft	7 ft x 14 ft	7 ft x 16 ft	7 ft x 18 ft
Overall width	100 in / 254 cm	100 in / 254 cm	100 in / 254 cm	100 in / 254 cm
Overall length	202 in / 513 cm	226 in / 574 cm	250 in / 635 cm	274 in / 696 cm
Usable width	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm	82 in / 208 cm
Usable length	144 in / 366 cm	168 in / 427 cm	192 in / 488 cm	216 in / 549 cm

AXLES CONFIGURATION

2 x 3,500 lb (1,588 kg) AXLES	SEKC4-712G235	SEKC4-714G235	SEKC4-716G235	SEKC4-718G235
Gross Vehicle Weight Rating (GVWR)	7,000 lb / 3,175 kg	7,000 lb / 3,175 kg	7,000 lb / 3,175 kg	7,000 lb / 3,175 kg
Trailer weight	1,500 lb / 680 kg	1,700 lb / 771 kg	1,900 lb / 862 kg	2,100 lb / 953 kg
Load capacity	5,500 lb / 2,495 kg	5,300 lb / 2,404 kg	5,100 lb / 2,313 kg	4,900 lb - 2,223 kg
Tire size	205/75R14 6 ply	205/75R14 6 ply	205/75R14 6 ply	205/75R14 6 ply
Deck height	23 in / 58 cm	23 in / 58 cm	23 in / 58 cm	23 in / 58 cm